

Molded Rubber Products

Electrical Apparatus
500-20

200 A 15 and 25 kV Class Bushing Well Insulated Plug

GENERAL

Cooper Power Systems 200 A, 15 and 25 kV Class Bushing Well Insulated Plug meets the full requirements of **IEEE Standard 386™**—Separable, Insulated Connector Systems. The bushing well plug provides an insulated, fully shielded, submersible cover for an unused 15 kV Class or 25 kV Class bushing well in deadfront equipment. The body is molded of high quality EPDM insulation and has a molded semi-conductive EPDM shield. A molded ground tab on the shield allows attachment of ground wire to ensure deadfront construction.

INSTALLATION

No special tools are required. The bushing well insulated plug is inserted in the bushing well of de-energized apparatus using a hotstick tool. Refer to Installation Instruction Sheet S500-20-1 for details.

PRODUCTION TESTS

Tests are conducted in accordance with **IEEE Standard 386™**.

- ac 60 Hz 1 Minute Withstand — 40 kV
- Minimum Corona Voltage Level — 19 kV

Test are conducted in accordance with Cooper Power Systems requirements.

- Physical Inspection
- Periodic Dissection
- Periodic Fluoroscopic Analysis

TABLE 1
Voltage Ratings and Characteristics

Description	kV
Standard Voltage Class	25
Maximum Rating Phase-to-Phase	26.3
Maximum Rating Phase-to-Ground	15.2
ac 60 Hz 1 Minute Withstand	40
dc 15 Minute Withstand	78
BIL and Full Wave Crest	125
Minimum Corona Voltage Level	19

Voltage ratings and characteristics are in accordance with **IEEE Standard 386™**.



Figure 1.
Bushing Well Insulated Plug with hotstick pulling eye.

ORDERING INFORMATION

To order the 15 and 25 kV Class Bushing Well Insulated Plug Kit, refer to Table 2.

TABLE 2
Bushing Well Insulated Plug Kit

Description	Catalog Number
Bushing Well Insulated Plug	IBWP225

- Each kit contains:
- Bushing Well Insulated Plug
 - Silicone Lubricant
 - Installation Instruction Sheet

Features and Detailed Description

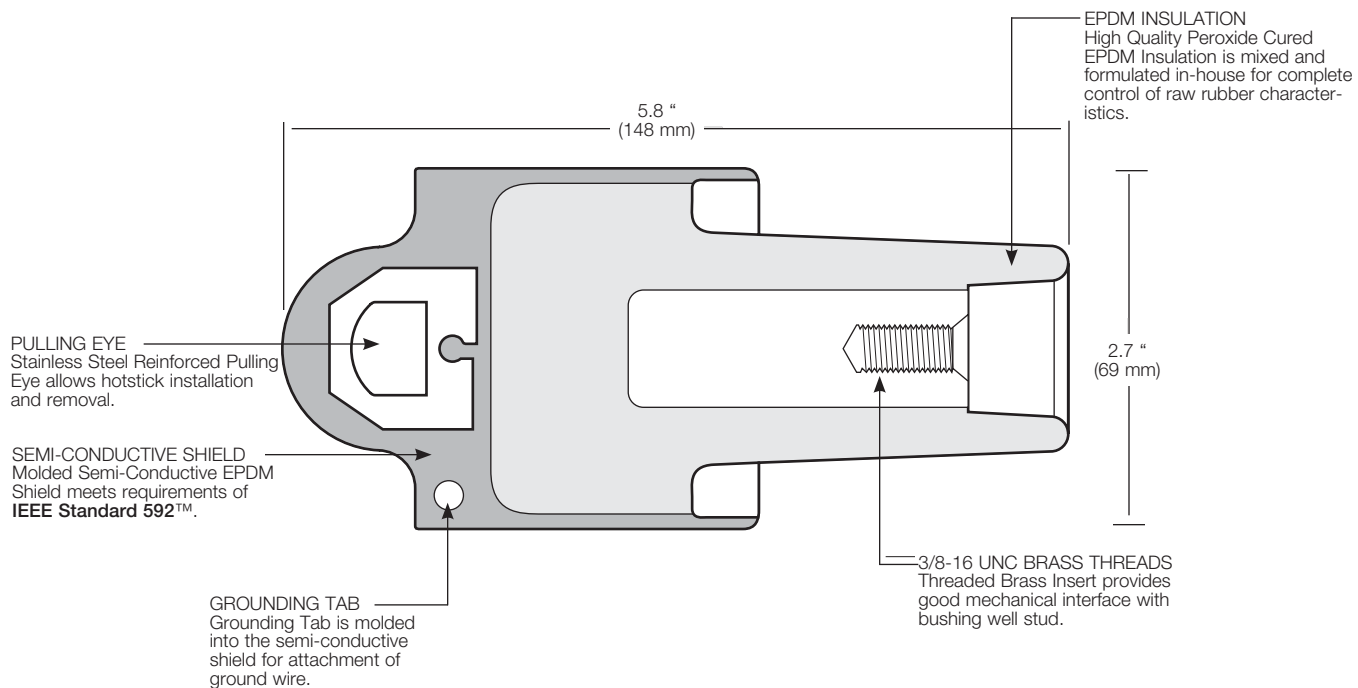


Figure 2.
Dimensional drawing shows insulation layers and threaded brass insert for solid interface.

NOTE: Dimensions given are for reference only.